


# OUTERIMPACT

## Ruger 57 M.R.A. (Modular Red Dot Adapter) Mounting Instructions


- While it is possible to install this mount without the use of a Gun Smith, we recommend using a certified Gun Smith for Installation

**WARNING:** Never remove or install components on a gun without ensuring the gun is not loaded and the chamber is clear.

**Step 1:** Locate bag marked "MNT HDWR" and remove the 2 Torx screws.

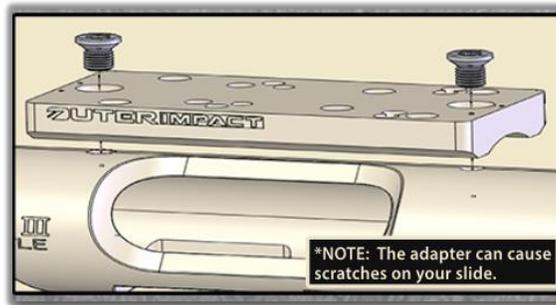

**Step 2:** Align M.R.A. with holes in the receiver. Fasten M.R.A. with T-15 Torx screws. Torque to **25 in/lbs.**

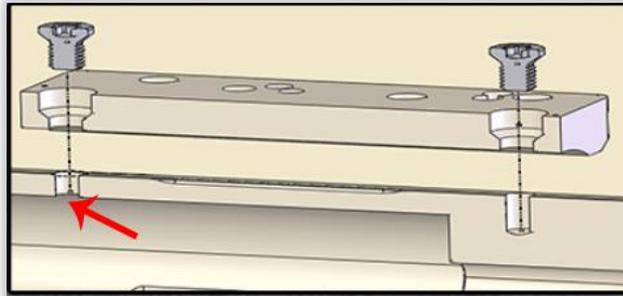

**Step 3:** Inspect the inside of the receiver to confirm the end of the torx screw does not interfere with the bolt.

**Utilize liquid thread locker upon final installation of all threaded fasteners**